



**STEPLUX**  
**SP01X SERIES - IP65**



**DESCRIPTIONS :**

Steplux LED SP01X Series is a wall recessed asymmetric mounting luminaire for outdoor applications. Using of high quality die cast housing and tempered protection glass, moulding shaped silicon seal integrated LED driver. Make this product suitable for the most severe conditions with protection degree IP 65.



**APPLICATIONS :**

Wall, stairs and other similar outdoor applications.

**SPECIFICATIONS**

Mounting	Wall recessed
Housing	Die-cast powder coated
LED module type	SMD LED
Voltage rating/ freq.	220-240V / 50-60 Hz
Control gear type	Integrated HF electronic LED driver
Beam angles	Asymmetric
Degree of protection	IP 65
Operating Temp.	-10°C - 50°C
Light controller	Toughened protection glass
Available Colour Temp.	3000K/4000K
Rated lifetime (L70)	50,000 Hrs (@25C°)

CODE	Wattage	Lumin	IP Rate	L	W	H
SP01X-LED 8W/S	8W	700LM	IP65	255	76	70

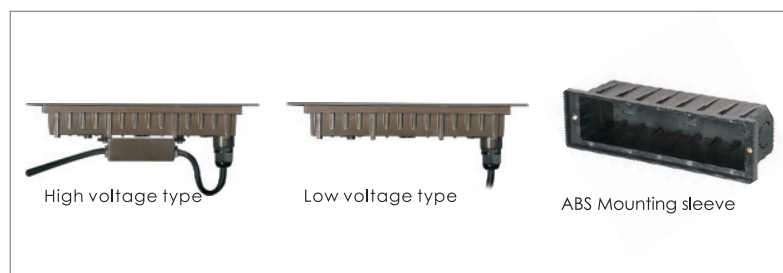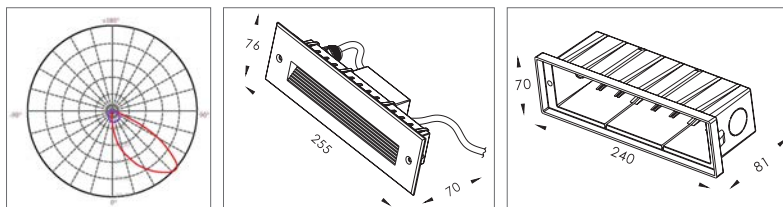

#### **Head office**

Malaz - Salahidin Road  
P.O Box 1246 Riyadh 11431

Tel : +966 11 4777 700  
Fax: +966 11 4789 469

#### **Western Region Office**

Tahliya Street  
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888  
Fax: +966 12 6633413

#### **Eastern Region Office**

King Abdulaziz Street  
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509  
Fax: +966 13 8329065

[ContactUs@noortek.com](mailto:ContactUs@noortek.com)



**[www.noortek.com](http://www.noortek.com)**