

DOWNLIGHTS

HALUX 3" S IP40/IP65

DOWNLIGHTS

HALUX 3" SQUARE IP40/ 65



SPECIFICATIONS :

Mounting	: Ceiling recessed
Lamp type	: Halogen
Lamp holder	: GU5.3
Control gear type	: HF Electronic transformer
Voltage Rating/ Freq.	: 220-240V / 60 Hz
Degree of protection	: IP 40/ 65
Internal Wiring	: 0.5 mm sq. solid copper wire PVC 105 deg C
Cable connection	: Terminal block, 2-pole, screw type with grounding
Conformity	: IEC 60598 / SASO 1318
Light controller	: CTG/SFG/FG

DESCRIPTIONS :

HALUX 3" square IP40/IP65 is a recessed luminaire of die casted aluminum with brush/polish finish. The aluminum optic is used with purity higher than 99% and reflectance higher than 80%. Higher IP protection (IP65) against dust and jetting water. Energy efficiency is obtained using an electronic transformer.

APPLICATIONS :

Decorative lighting scenes in shops, malls and fancy offices.



CODE	Sq	H
DLS[3"]-HAL-MR16-20W [WH] [IP40]	94	31
DLS[3"]-HAL-MR16-35W [WH] [IP40]	94	31
DLS[3"]-HAL-MR16-50W [WH] [IP40]	94	31

CODE	Sq	H
DLS[3"]-HAL-MR16-20W [WH] [IP65]	94	31
DLS[3"]-HAL-MR16-35W [WH] [IP65]	94	31
DLS[3"]-HAL-MR16-50W [WH] [IP65]	94	31


OPTIONS:

- Dimmable transformer [1-10v/DALI]
- Emergency Kit [EM1.5] [EM3]
- Trim Color [WH] [BR] [CR] [AU] [NI] [SI]

Ordering Example

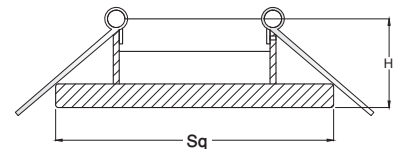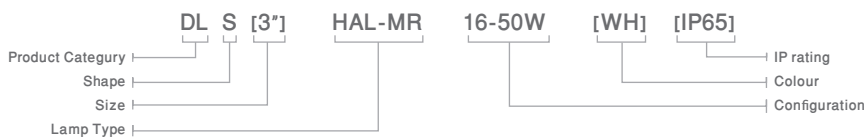

Mounting System

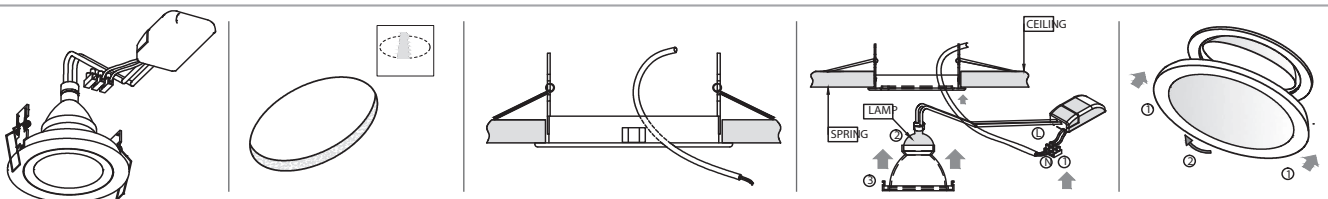

Head office

Malaz - Salahidin Road
P.O Box 1246 Riyadh 11431

Tel : +966 11 477 77 00
Fax: +966 11 478 94 69

Western Region Office

Tahliya Street
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888
Fax: +966 12 6633413

Eastern Region Office

King Abdulaziz Street
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509
Fax: +966 13 8329065

ContactUs@noortek.com



www.noortek.com