

**WRR DM LED**  
**IP40**

# LED INDOOR




## DESCRIPTIONS

WRR DM LED IP40 is a decorative surface mounted wrap around LED luminaire coming with high efficient electronic driver as per Saudi and international standards. The housing is made of steel housing finished with 3-stages pretreatment electrostatic powder coating. The luminaire has polycarbonate covers (prismatic) which gives more light uniformity.

## APPLICATIONS

Schools, hospitals, and all other similar applications.

## DIMENSIONS




## SPECIFICATIONS

Mounting	Surface & Wall mounted
LED module type	SMD LED chips
Voltage rating/ freq.	220-240V / 50-60 Hz
Driver	Integrated Electronic LED driver
Power factor	>0.95
Degree of protection	IP 40
Light controller	Prismatic cover
Standard color temp.	3000K/4000K/6500K
Operating temperature	-10 : 40°C
Rated lifetime (L70)	50,000 Hrs (@25°C)

CODE	Wattage	Lumin	IP Rate	L	W	H
WRR-DM-25W	25W	2500LM	IP40	645	208	70
WRR-DM-36W	36W	3600LM	IP40	1255	208	70
WRR-DM-50W	50W	5000LM	IP40	1255	208	70

## MOUNTING SYSTEM

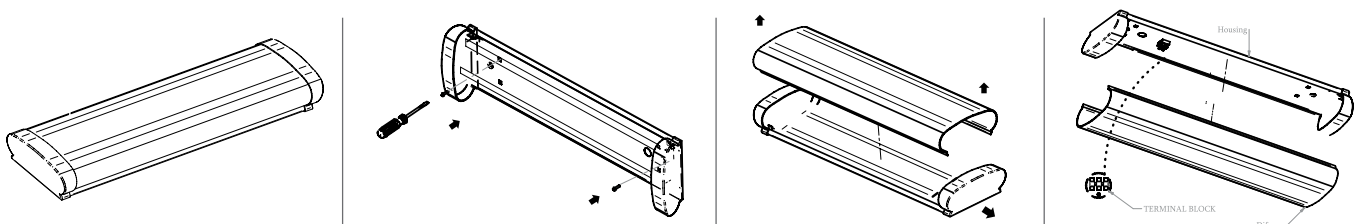

#### **Head office**

Malaz - Salahidin Road  
P.O Box 1246 Riyadh 11431

Tel : +966 11 4777 700  
Fax: +966 11 4789 469

#### **Western Region Office**

Tahliya Street  
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888  
Fax: +966 12 6633413

#### **Eastern Region Office**

King Abdulaziz Street  
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509  
Fax: +966 13 8329065

[ContactUs@noortek.com](mailto:ContactUs@noortek.com)



**[www.noortek.com](http://www.noortek.com)**